

# AR-BH


## 袋式除尘器

### Bag Dust Collector

#### | 概述 | Overview

袋式除尘器是以圆布袋为核心过滤元件，并采用脉冲喷吹方式的除尘设备。广泛用于电力、冶金、建材、化工、医药、食品等行业的粉尘治理。

Bag dust collector is a dust removal equipment with a round cloth bag as the core filter element and a pulse injection mode. Widely used in new energy, electric power, metallurgy, building materials, chemical, medicine, food and other industries of dust control.

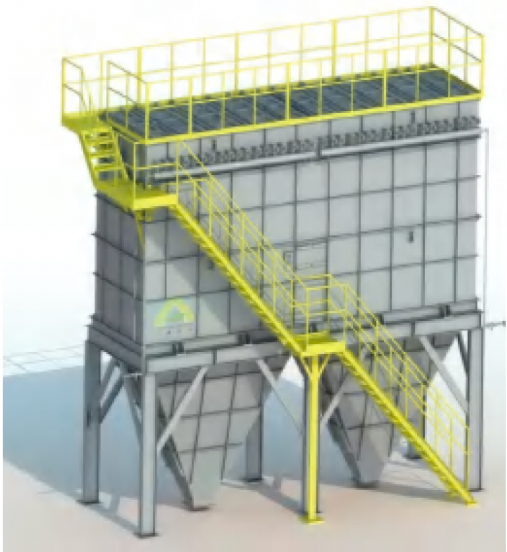

- ① 进风口采用独特的引流结构，烟气气流均匀分布到过滤元件上；  
Adopt a unique drainage structure at inlet, and the flue gas is evenly distributed on the filter elements;
- ② 可模块化组成需要的处理风量；  
Easy to combine the modular to meet the required air volume;
- ③ 仓室相对独立，以便于不停机更换布袋；  
The warehouse is relatively independent in order to replace cloth bags without stopping the machine;
- ④ 烟气温度、除尘器运行压力检测、料位检测及故障检测等系统操作运行状态检测；  
Flu gas temperature, dust collector operating pressure detection, material level detection and fault detection system operation status detection;

| 型号<br>Model | 过滤面积(m²)<br>Filtration Area | 处理风量(m³/h)<br>Air flow | 脉冲阀<br>Pulse valve |             | 滤袋规格<br>Filter bag<br>specification | 滤袋数量<br>Filter bag<br>count |
|-------------|-----------------------------|------------------------|--------------------|-------------|-------------------------------------|-----------------------------|
|             |                             |                        | 规格<br>size         | 数量<br>count |                                     |                             |
| AR-BH-460   | 460                         | 26000-41000            | 2-3"               | 25          | /                                   | 300                         |
| AR-BH-540   | 540                         | 32000-48000            |                    | 25          |                                     | 350                         |
| AR-BH-650   | 650                         | 38000-57000            |                    | 30          |                                     | 420                         |
| AR-BH-750   | 750                         | 44000-67000            |                    | 35          |                                     | 490                         |
| AR-BH-860   | 860                         | 51000-77000            |                    | 40          |                                     | 560                         |
| AR-BH-920   | 920                         | 55000-82000            |                    | 50          |                                     | 600                         |
| AR-BH-1070  | 1070                        | 64000-96000            |                    | 50          |                                     | 700                         |